

TOSHIBA

SMMSu

SUPER MODULAR MULTI SYSTEM


The ultimate VRF system



 *Better Air Solutions*

EXPERIENCE THE FUTURE

The expectations of a modern air conditioning system have evolved over the past years. Today, advanced comfort goes hand in hand with reduced energy and maintenance costs, combined with maximized simplicity and true operational flexibility. SMMS-u associates all of Toshiba innovative spirit and outstanding expertise to create highly efficient solution with maximum end user comfort at its core.

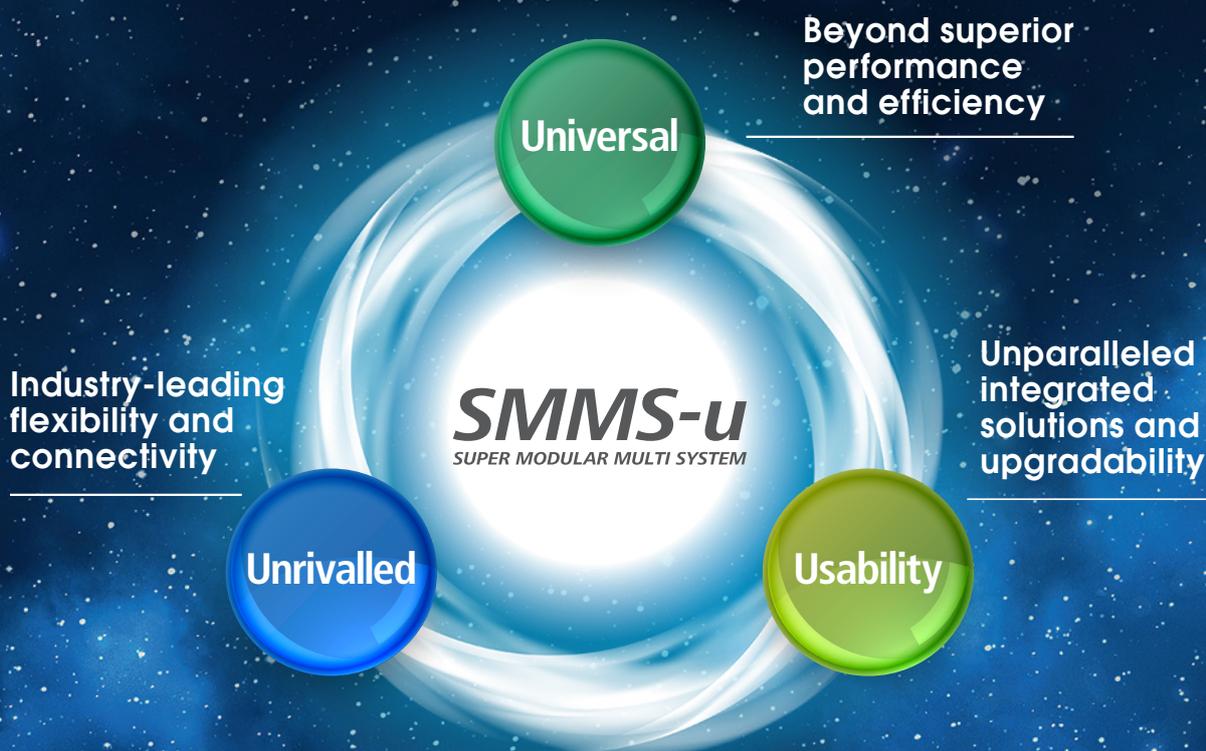

Benefits for consultants

SMMS-u offers unlimited possibilities in terms of capacity, connectivity, indoor unit lineup, and control solutions, providing the correct solution for your customers needs. Toshiba's intuitive selection tool will guide you through the selection process with minimal input from your side, ensuring trouble-free installation and operation. All SMMS-u systems come with the Eurovent certification as standard.



Benefits for users

There is nothing like a comfortable place to enjoy the present moment. Full of Toshiba innovations, the new SMMS-u guarantees all year round comfort combined with superior energy management, advanced air filtration and full control solutions for maximized product usability.



Benefits for installers

Designed to perform and engineered to perfection, SMMS-u excels in managing the heating, cooling, hot water and fresh air input into offices, shops, restaurants and domestic housing, with unrivalled connection flexibility. You can rely on Toshiba support, to assist you from the project phase to commissioning and troubleshooting.

A BRAND NEW CHASSIS

Discover a totally new redesigned chassis which is now the perfect mix between dimension, efficiency, capacity & sound level. Engineered in Japan, SMMS-u integrates all the latest technological innovations from Toshiba to achieve top class efficiency and ensure unrivalled comfort levels.

Up to 24HP single module / 120HP combination

Simplified maintenance: Easy access to all internal components

Earthquake and typhoon resistant chassis



Strong air flow: up to 80Pa available pressure

Compact chassis: only 1.690mm height

Super-efficient: full product height heat exchanger

8 to 14HP

16 to 24HP

UNIQUE ON THE MARKET: TRIPLE ROTARY COMPRESSOR

The exclusive Toshiba triple rotary compressor brings outstanding performances to the SMMS-u with no compromise on system reliability.

TOP CLASS EFFICIENCY



Utilizing the new highly efficient core technologies results in greater energy efficiency and performances.



 Large capacity



 Wide operating range

 Less refrigerant needed

 Low vibration

 Low noise

 DLC treatment

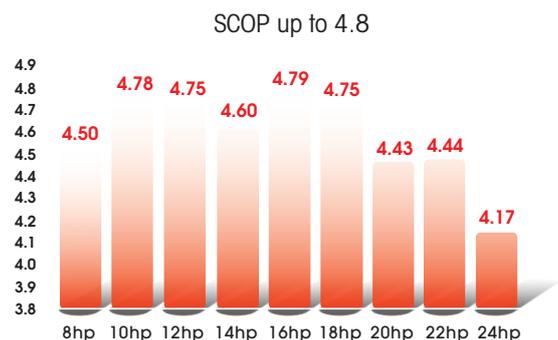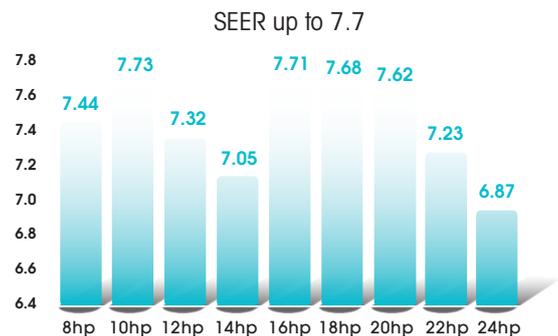

STRONG CONNECTIVITY


SMMS-u oversteps all the limits of VRF for maximized project coverage. Whatever the piping length, the height difference, the number of indoor units connected and operating... SMMS-u is always delivering the best.

3,000 combinations patterns
to achieve up to 120HP

1,200m max
piping length

110m max
piping height

Heating, cooling, fresh air
and hot water production

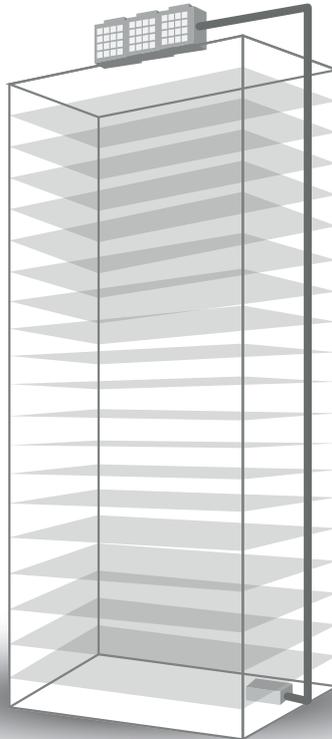

Up to 128 indoor
units connected

-25°C heating
+52°C cooling

Max 200%
diversity ratio

STRONG ADAPTABILITY

SMMS-u integrates new features to adapt operations to local constraints with a constant target: the alliance of comfort and energy savings.



Split heat
exchanger

Heat Exchanger automatically varies depending on workload, maximizing energy savings and system reliability.



Demand
control

Smart Grid ready with remote or dry contact demand control function.



Autobackup
function

Automatic backup in case of combinations systems failure.



Rotation
drive

Smart control to automatically equalize compressor operating hours.



Balance oil
circuit free

No oil balance pipe needed with the new lubrication technology.

COMFORT ABOVE ALL

Providing end user high level of comfort is the SMMS-u priority. In addition to a wide range of indoor units adapted to any kind of room configuration, defrost logic has also evolved to increase continuous run time, shorten defrost cycles. Toshiba is offering one of the most accurate refrigerant flow management system.


INTELLIGENT DEFROST

Individual defrost : continuous heating up to 5 hours.




Kobetsu

No simultaneous defrost in combination configuration. Heating operation never stopped.

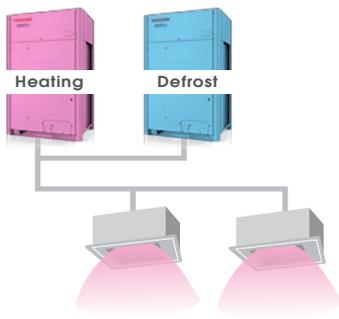


Renkey

No simultaneous defrost with multi system configuration. Heating operation never stopped.

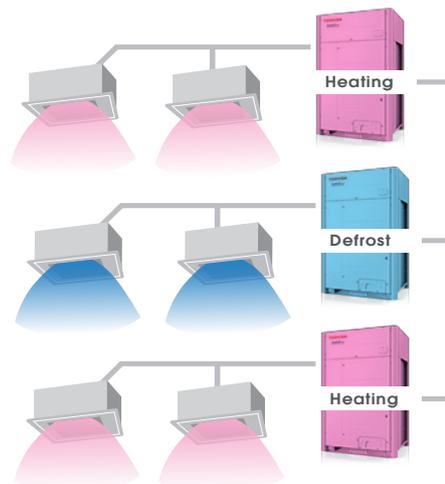

INTELLIGENT VRF CONTROL

Mixing 0.1Hz compressor speed control with high precision pulse motor valve, SMMS-u is delivering the right quantity of refrigerant to all indoor units in demand. No extra quantity of refrigerant is compressed, only the good one. Result is a power consumption directly link to the user demand no more, no less.

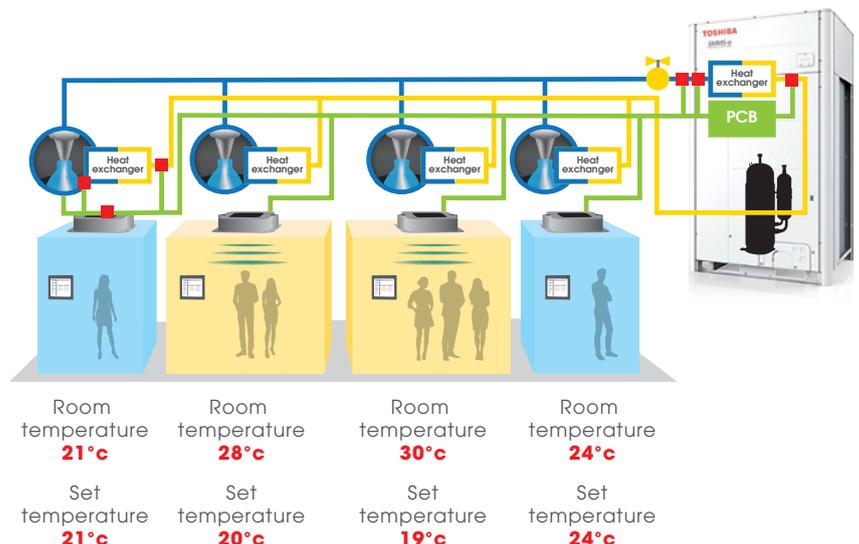

WIDEST INDOOR UNIT RANGE

16 different indoor unit types. 17 capacities from 0.3 to 14HP. Thousands of combinations to perfectly match users expectations.

2021 NEW
indoor units



Smart cassette
High performance
Smart operation



1-Way cassette
0.3HP capacity
Compact chassis
Smart operation
Advanced filtration



Slim duct
0.3HP capacity
Compact chassis
Quiet operation

SMMS-u Indoor units

| Model | (HP) | 0,3 | 0,6 | 0,8 | 1 | 1,25 | 1,7 | 2 | 2,5 | 3 | 3,2 | 4 | 5 | 6 | 8 | 10 | 12 | 14 | |
|--|------|-----|-----|-----|-----|------|-----|-----|-----|---|-----|------|----|----|------|----|----|----|--|
| | (kW) | 1,9 | 1,7 | 2,2 | 2,8 | 3,6 | 4,5 | 5,6 | 7,1 | 8 | 9 | 11,2 | 14 | 16 | 22,4 | 28 | 34 | 40 | |
| CASSETTE TYPES | | | | | | | | | | | | | | | | | | | |
| High performance 4-way Cassette MMU-UP_1H-E | | | | | | | | | | | | | | | | | | | |
| 4-way Cassette MMU-UP_1HP-E | | | | | | | | | | | | | | | | | | | |
| Compact 4-way Cassette MMU-UP_1MH-E | | | | | | | | | | | | | | | | | | | |
| 2-way Cassette MMU-UP_1WH-E | | | | | | | | | | | | | | | | | | | |
| 1-way Cassette MMU-UP_1YH-E | | | | | | | | | | | | | | | | | | | |
| 1-way Cassette MMU-UP_1SH-E | | | | | | | | | | | | | | | | | | | |
| DUCT TYPES | | | | | | | | | | | | | | | | | | | |
| Slim Duct MMD-UP_SPH-E | | | | | | | | | | | | | | | | | | | |
| Concealed Duct MMD-UP_BHP-E | | | | | | | | | | | | | | | | | | | |
| HSP Concealed Duct MMD-UP_HP-E | | | | | | | | | | | | | | | | | | | |
| Fresh Air Intake Duct MMD-UP_1HFP-E | | | | | | | | | | | | | | | | | | | |
| CEILING TYPES | | | | | | | | | | | | | | | | | | | |
| Ceiling MMC-UP_HP-E | | | | | | | | | | | | | | | | | | | |
| HIGH WALL TYPES | | | | | | | | | | | | | | | | | | | |
| High Wall (with PMV) MMK-UP_HP-E | | | | | | | | | | | | | | | | | | | |
| High Wall (without PMV) MMK-UP_HPL-E | | | | | | | | | | | | | | | | | | | |
| FLOOR STANDING TYPES | | | | | | | | | | | | | | | | | | | |
| Console MML-UP_1BH-E | | | | | | | | | | | | | | | | | | | |
| Floor Standing Cabinet MML-UP_1H-E | | | | | | | | | | | | | | | | | | | |
| Floor Standing Concealed MML-UP_1NH-E | | | | | | | | | | | | | | | | | | | |
| Floor Standing MMF-UP_1H-E | | | | | | | | | | | | | | | | | | | |
| WATER PRODUCTION | | | | | | | | | | | | | | | | | | | |
| Mid Temperature Water Module MMW-UP_1LQ-E | | | | | | | | | | | | | | | | | | | |

● New

WIDE CONTROL LINEUP

Wireless, simplified, advanced, individual, centralized, connected, with touch screen... Toshiba is offering a large choice of control solutions all compatible with the new TU2C Link protocol. SMMS-u is also compatible with Bacnet®, Lonworks® and Modbus® BMS languages

BMS-CT256U-E
Max 256 indoor units connected




RBC-AMS51U-ES/EN
Max 16 indoor units connected



RBC-ASC11U-E
Max 16 indoor units connected


EASY COMMISSIONING AND MAINTENANCE

Save time during commissioning and maintenance. Choose between the "Wave Tool Advance" using Smartphone NFC connection or the link adaptor connected to the outdoor or indoor unit.


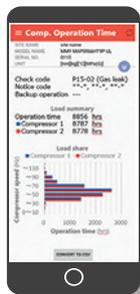


Wireless connection using smartphone* NFC technology to collect system data

* Please contact Toshiba for Android® phone compatibility list.



System operation self record using link adaptor

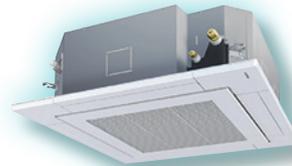

Get access to system data indoor using link adaptor



Direct USB connection to get access to system data

TOSHIBA SELECTION TOOL



Designed for novice and expert users, Toshiba selection software creates simple, yet detailed VRF system schematics. It is highly versatile, allowing the level of detail to be tailored to suit customer requirements. Final detailed reports can be produced and sent to customers in PDF format or in more complex files, such as AutoCAD DXF, allowing simple integration into existing software packages.

TOSHIBA

SMMS-u Performances

| Outdoor unit | | MMY- MUP0801HT8P-E | MUP1001HT8P-E | MUP1201HT8P-E | MUP1401HT8P-E | MUP1601HT8P-E | MUP1801HT8P-E | MUP2001HT8P-E | MUP2201HT8P-E | MUP2401HT8P-E |
|---|-------|--------------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| | | 8 HP | 10 HP | 12 HP | 14 HP | 16 HP | 18 HP | 20 HP | 22 HP | 24HP |
| Cooling capacity | kW | 22.40 | 28.00 | 33.50 | 40.00 | 45.00 | 50.40 | 56.00 | 61.50 | 67.00 |
| Power input | kW C | 5.64 | 8.36 | 10.34 | 14.55 | 14.06 | 15.90 | 18.01 | 20.43 | 24.19 |
| EER | W/W | 3.97 | 3.35 | 3.24 | 2.75 | 3.20 | 3.17 | 3.11 | 3.01 | 2.77 |
| SEER | n/std | 288.67%/7.44 | 299.92%/7.73 | 284.02%/7.32 | 273.54%/7.05 | 299.15%/7.71 | 297.98%/7.68 | 295.66%/7.62 | 280.52%/7.23 | 266.56%/6.87 |
| Running current | A C | 9.15 | 13.40 | 16.00 | 22.60 | 21.60 | 24.40 | 27.70 | 31.40 | 37.10 |
| Heating capacity rated/max | kW | 22.4/25 | 28/31.5 | 33.5/37.5 | 40/45 | 45/50 | 50.4/56 | 56/63 | 61.5/69 | 67/70 |
| Power input (rated) | kW H | 5.28 | 7.20 | 7.77 | 10.00 | 11.94 | 12.54 | 14.93 | 16.18 | 18.98 |
| COP (rated) | W/W | 4.24 | 3.89 | 4.31 | 4.00 | 3.77 | 4.02 | 3.75 | 3.80 | 3.53 |
| SCOP | n/std | 174.6%/4.5 | 185.46%/4.78 | 184.3%/4.75 | 178.48%/4.6 | 185.85%/4.79 | 184.3%/4.75 | 171.88%/4.43 | 172.27%/4.44 | 161.8%/4.17 |
| Running current | A H | 8.56 | 11.50 | 12.10 | 15.50 | 18.30 | 19.30 | 22.90 | 24.80 | 29.10 |
| Maximum overcurrent protection ² | A | 20 | 32 | 32 | 40 | 40 | 50 | 50 | 63 | 80 |

SMMS-u Physical data

| Outdoor unit | | MMY- MUP0801HT8P-E | MUP1001HT8P-E | MUP1201HT8P-E | MUP1401HT8P-E | MUP1601HT8P-E | MUP1801HT8P-E | MUP2001HT8P-E | MUP2201HT8P-E | MUP2401HT8P-E |
|--|--------------------|----------------------|----------------------|----------------------|----------------------|------------------------|------------------------|------------------------|----------------------|----------------------|
| | m ³ /h | 9900 | 10500 | 11700 | 11880 | 15300 | 16800 | 15900 | 16500 | 16500 |
| Sound Power Level | dB(A) H | 75.0 | 77.0 | 79.0 | 79.0 | 83.0 | 84.0 | 86.0 | 86.0 | 86.0 |
| Sound pressure level | dB(A) H | 53.0 | 55.0 | 58.0 | 58.0 | 60.0 | 61.0 | 63.0 | 63.0 | 63.0 |
| Sound Power Level | dB(A) C | 76.0 | 77.0 | 81.0 | 82.0 | 86.0 | 89.0 | 90.0 | 90.0 | 90.0 |
| Sound pressure level | dB(A) C | 56.0 | 58.0 | 62.0 | 62.0 | 63.0 | 67.0 | 67.0 | 67.0 | 67.0 |
| External Static pressure available | Pa | 80.0 | 80.0 | 80.0 | 80.0 | 80.0 | 80.0 | 80.0 | 80.0 | 80.0 |
| Dimensions (h x w x d) | mm | 1690 x 990 x 780 | 1690 x 1290 x 780 | 1690 x 1290 x 780 | 1690 x 1290 x 780 | 1690 x 1290 x 780 | 1690 x 1290 x 780 |
| Weight | kg | 228 | 228 | 228 | 228 | 312 | 312 | 334 | 356 | 356 |
| Compressor type | | Hermetic Twin Rotary | Hermetic Twin Rotary | Hermetic Twin Rotary | Hermetic Twin Rotary | Hermetic Triple Rotary | Hermetic Triple Rotary | Hermetic Triple Rotary | Hermetic Twin Rotary | Hermetic Twin Rotary |
| Refrigerant charge R410A | kg | 6.00 | 6.00 | 6.00 | 6.00 | 9.00 | 9.00 | 9.00 | 9.00 | 9.00 |
| | TCO _{2eq} | 12.5 | 12.5 | 12.5 | 12.5 | 18.8 | 18.8 | 18.8 | 18.8 | 18.8 |
| Gas line type - diameter | | Brazed - 3/4" | Brazed - 7/8" | Brazed - 1-1/8" | Brazed - 1-1/8" | Brazed - 1-1/8" | Brazed - 1-1/8" | Brazed - 1-1/8" | Brazed - 1-1/8" | Brazed - 1-3/8" |
| Liquid line type - diameter | | Brazed - 1/2" | Brazed - 1/2" | Brazed - 1/2" | Brazed - 5/8" | Brazed - 5/8" | Brazed - 5/8" | Brazed - 5/8" | Brazed - 3/4" | Brazed - 3/4" |
| Farthest piping equivalent length | m | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 | 250 |
| Farthest piping real length | m | 210 | 210 | 210 | 210 | 210 | 210 | 210 | 210 | 210 |
| Maximum pipe length | m | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 | 500 |
| Maximum lift (indoor unit above/below) | m | 110/110 | 110/110 | 110/110 | 110/110 | 110/110 | 110/110 | 110/110 | 110/110 | 110/110 |
| Operating range - db | C C | -10/52 | -10/52 | -10/52 | -10/52 | -10/52 | -10/52 | -10/52 | -10/52 | -10/52 |
| Operating range - wb | C H | -25/15.5 | -25/15.5 | -25/15.5 | -25/15.5 | -25/15.5 | -25/15.5 | -25/15.5 | -25/15.5 | -25/15.5 |
| Power supply | V-ph-Hz | 380/415-3-50 | 380/415-3-50 | 380/415-3-50 | 380/415-3-50 | 380/415-3-50 | 380/415-3-50 | 380/415-3-50 | 380/415-3-50 | 380/415-3-50 |

C: cooling mode - H: heating mode



TOSHIBA Air Conditioning participates in the ECP program for Comfort Air Conditioners (AC). Check ongoing validity of certificate: www.eurovent-certification.com



Better Air Solutions

AHI CARRIER SOUTH EASTERN EUROPE AIR CONDITIONING SINGLE MEMBER S.A.

HEADQUARTERS

18, Kifissou Ave. 104 42 - Athens, Tel.: +30 210 6796300, Fax: +30 210 6796390, www.toshiba-aircon.gr

THESSALONIKI BRANCH

5, Ag. Georgiou Str., Cosmos Offices, 570 01 - Patriarhiko Pileas, Thessaloniki, Tel.: +30 231 3080430, Fax: +30 231 3080435

AHI CARRIER HVAC BULGARIA EOOD

Trade Center Europe, Building 6, floor 3, office 6, 7 Iskarsko Shose Blvd. Sofia, 1528 - Bulgaria, Tel.: +35 929483960 Fax: +35 929483990, www.toshiba-aircon.bg

AHI CARRIER ROMANIA SRL

Intrarea Nestorei 1, Corp B, Et. 5, Sector 4, Cladirea River Plaza, RO-040295 Bucuresti, Romania, Tel.: +40 214 050751, Fax: +40 214 050753, www.toshiba-hvac.ro